


MARS

CEMENT 8. 0



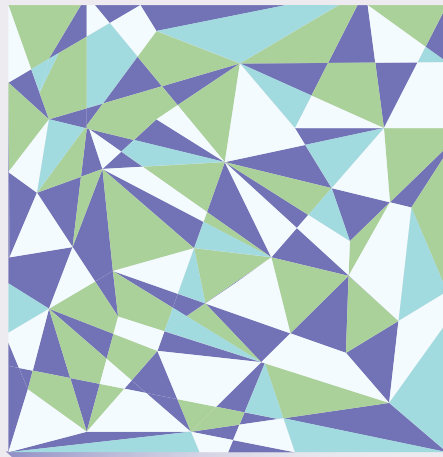

MARS

CEMENT 8. 0







WHITE

MATT
LAP PATO
ANTISLIP



R9



R11



GREY

MATT
LAP PATO
ANTISLIP



R9



R11



CHARCOAL

MATT
LAP PATO
ANTISLIP

 R9


 R11



SIZES



R9/R11



60x60
24"x24"



30x60
12"x24"




30x30
12"x12"

FINISH
MATT
LAPPATO
ANTISLIP

COLORS
WHITE
GREY
CHARCOAL

DECORS




HEXAGON
30x30 - 12"x12"



DIAMOND
30x30 - 12"x12"



CUBE
30x30 - 12"x12"



SLIM HEXAGON
30x30 - 12"x12"



STRIPS
30x60 - 12"x24"



STONE MOSAIC
30x60 - 12"x24"



ZIG ZAG
30x60 - 12"x24"



STONE STRIPS
30x60 - 12"x24"

TECHNICAL CHARACTERISTICS

		TECHNICAL FEATURES	SPECIFICATION	VALUE REQUIRED	*SPACE VALUES
REGULARITY CHARACTERISTICS		LENGTH AND WIDTH	ISO 10545-2	± 0.6%	-0.05%~-0.02%
		THICKNESS	ISO 10545-2	± 5.0%	-0.05%~-+1.31%
		SQUARENESS	ISO 10545-2	± 0.5%	-0.11%~-+0.09%
		STRAIGHTNESS OF THE EDGES	ISO 10545-2	± 0.5%	-0.02%~-+0.03%
		FLATNESS	ISO 10545-2	± 0.5%	+0.06%~-+0.08%
STRUCTURAL CHARACTERISTICS		WATER ABSORPTION	ISO 10545-3	≤ 0.5%	0.29%
		BREAKING STRENGTH	ISO 10545-4	≥ 1300 N	1889N
MODULUS OF RUPTURE		≥ 35 N/mm ²		40.7 N/mm ²	
CHEMICAL CHARACTERISTICS		CHEMICAL RESISTANCE	ISO 10545-13	TEST METHOD AVAILABLE DECLARED VALUE	GA
		RESISTANCE TO STAINING	ISO 10545-14	TEST METHOD AVAILABLE DECLARED VALUE	PASSED
SAFETY CHARACTERISTICS		SLIP RESISTANCE INCLINED PLATFORM	DIN 51130	TEST METHOD AVAILABLE	R9/R11
			DIN 51097		

SIZE, WEIGHT AND PACKAGING

SIZE	PIECES/BOX	MQ/BOX	KG/BOX	MQ/PALLET	KG/PALLET	BOX/PALLET
60x60	4	1.44	31.5	37.44	1179	36
30x60	8	1.44	31.5	57.6	1305	40
30x30	11	0.99	22	53.46	1233	54

FORMATS

	60x60	30x60	30x30
WHITE			
GREY			
CHARCOAL			

◆ MATT ● LAPPATO ◆ ANTISLIP

THICKNESS RECTIFIED

PLEASE PASTE YOUR NAMECARD HERE